


Glass mash 60

Item No. 35.010, 35.013

- **Sturdy standard product**

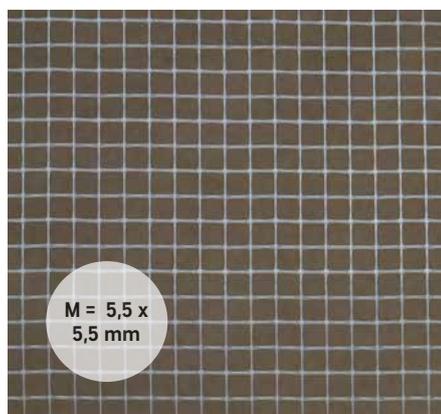

Surface reinforcement for all clay plasters. ClayTec Glass mash 60 is a gauze made of glass fibre yarn/roving, enhanced with polymer finishing. It is tensile, very fine, and particularly easy to handle.

 **ClayTec**[®]

GERMANY
© ClayTec GmbH & Co. KG
Nettetalter Straße 113-117
D-41751 Viersen-Boisheim
+49 (0)2153 918-0
service@claytec.com
claytec.com

2026/2
Changes and errors excepted.
Current version available at
claytec.com

Glass mash 60

Item No. 35.010, 35.013

Application Surface reinforcement for clay plasters and wood fibre interior insulation.

Composition Gauze made of glass fibre yarn/roving, enhanced with polymer finishing for scrim. Weight approx. 60 g/m², warp/weft approx. 16/16 fibres per 10 cm, mesh size approx. 5.5 x 5.5 mm. Alkali resistant.

Form of delivery On rolls, in surface reinforcement; width 100 cm, length 100 m (35.010) and 35 m (35.013).

Storage Can be stored for at least three years if kept dry, well-ventilated and protected against direct sunlight.

Amount required Surface reinforcement: equal to m² plaster surface plus an additional 10-20 % extra for waste and overlapping.

Method of use Surface reinforcement: The mesh is laid on the mortar while it is still freshly applied and plastic, and rubbed in with a smoothing board. Approx. 10 cm overlap must be provided in areas around joints.

Claims for compensation that do not result from factory mixing errors are excluded. Subject to change and errors excepted. As of 2026/2.